PROFESSIONAL MEASURING
SINCE 1844

KERN


Product brochure

30.10.2026

# SAUTER DA 10-3

Comfortable testing of screw tops, e.g. bottles, jars etc.

ENGLISH

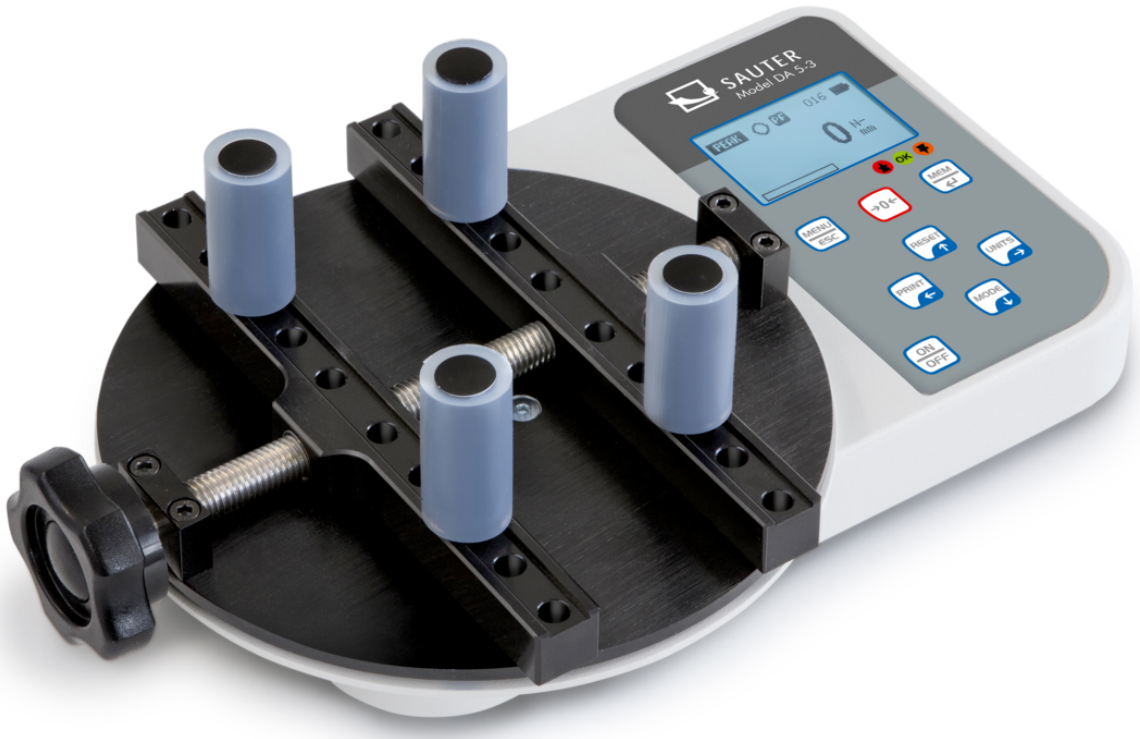


## CONTACT

**KERN & SOHN GmbH**
**Ziegelei 1**
**72336 Balingen**
**Germany**

**+49 7433 9933-0**
**info@kern-sohn.com**
**www.kern-sohn.com**








## APPLICATION EXAMPLE








ENGLISH

## FEATURES

- Optimised for torque testing of bottles, jars and other packaging with screw tops with a minimum diameter of 15 mm and a maximum diameter of 160 mm, in the food industry and pharmaceutical industry, as well as in the manufacturing of cosmetics such as, for example, lipsticks, etc.
- Quick pin system: The four bottle mounts (holders) are pushed in, instead of being screwed in, to save time. This allows you to reconfigure quickly for other bottle sizes
- Metal housing for durable use in harsh environmental conditions
- Capacity display: A bar lights up to show how much of the measuring range is still available
- LCD graphics display with backlight
- Rubber feet with anti-slip feature
- Internal data memory saves up to 500 measurements. The memory contents can be transferred to the PC using optional software
- Data interface USB and RS-232 included
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Can be used in both directions of rotation
- Measuring with tolerance range (limit-setting function): Upper and lower limiting can be programmed individually. The process is supported by an audible and visual signal
- AUTO-OFF function
- Scope of delivery: four bottle holders with rubber coating, sturdy carrying case

## TECHNICAL DATA

- Selectable measuring units: Nm, kgf/cm, kgf/m, in/lbs, ft/lbs
- Measuring precision: ± 0,5% of [Max]
- Usable measuring range: 5 – 100 % of [Max]
- Overload protection: 120% of [Max]
- Rechargeable battery pack integrated, as standard, operating time up to 18 h without backlight, charging time approx. 14 h
- Overall dimensions 250×160×100 mm
- Net weight approx. 3,0 kg

ENGLISH

## MAIN SCOPE OF APPLICATIONS

- Food industry
- Cosmetics industry
- Pharmaceutical applications
- Test laboratories
- Chemical industry

## PICTOGRAMS

Standard




Option



## MODEL OVERVIEW

| Model | Measuring range [Max] | Readout [d] | Diameter test object |
|---|---|---|---|
| DA 1-4 | 1 Nm | 0,2 mNm | 16 cm |
| DA 5-3 | 5 Nm | 0,001 Nm | 16 cm |
| DA 10-3 | 10 Nm | 0,002 Nm | 16 cm |

## ACCESSORIES

| Model | Description |
|---|---|
| FL-A01 | USB cable FL-A01 |
| FL-A04 | Cable FL-A04 |
| YKT-01 | Needle printer YKT-01 |

## SOFTWARE

| Model | Description |
|---|---|
| AFH FAST | Data transfer software for force-time-measurements, AFH FAST |
| Sauter Readout | Data transfer software Sauter Readout |

## SERVICES

| Model | Description |
|---|---|
| 961-120 | Factory calibration certificate 961-120 |
| 970-109 | Warranty extension (+2 years) 970-109 |

# KERN Pictogram Overview

| | |
|---|---|
|  | Peak hold function: capturing a peak value within a measuring process |
|  | Memory: Device-internal memory capacity, e.g. for article data, measuring data, tare weights, PLU etc. |
|  | Data interface RS-232: For connection to printers, PCs or other peripheral devices for data transfer over longer distances. Network in bus topology possible |
|  | Data Interface USB: For connection to printers, PCs or other peripheral devices |
|  | Statistics: using the saved values, the device calculates statistical data, such as average value, standard deviation etc. |
|  | ZERO: Reset the display to 0 |
|  | Units can be switched to e.g. non-metric units |
|  | Measuring with tolerance range (checkweighing): Upper and lower limit values can be programmed, e.g. for sorting, portioning or for measuring coatings or material thicknesses. The process is supported by an acoustic and/or optical signal |
|  | Rechargeable battery pack: Rechargeable set |
|  | Plug-in power supply: 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available |
|  | Package shipment by courier service: The duration of internal product provision is one day |
|  | PC Software: to transfer the measurements from the device to a PC |
|  | Factory calibration (ISO): Factory calibration takes 4 working days |

ENGLISH