


KERN ALS 250-4A

Analytical balance with high weighing capacity, graphic display and convenient recipe function

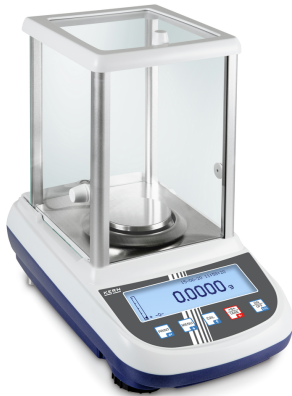

Category

Brand	KERN
Product category	Laboratory balance
Product group	Analytical balance
Product family	ALS-A

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Force compensation
Weighing capacity [Max]	250 g
Weighing capacity [Max] (ct)	1250 ct
Readability [d]	0,0001 g
Readability carat [d] (ct)	0,001 ct
Reproducibility	0,0001 g
Linearity	± 0,0003 g
USP Minimum weight of sample (k = 2, U = 0.1%)	200 mg
Resolution	2.500.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	250 g (E2)
Stabilization time	4 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,0004 g
Maximum creep (15 minutes)	1 mg
Maximum creep (30 minutes)	2 mg
Default unit	g
Units	g
	mg
	gn
	dwt
	tl (Tw) tl (HK)

	ozt
	tl (Singap, Malays)
	ct
	mo
	lb
	oz

Display

Display type	LCD graphic
Display backlight	✓
Display screen size	132×38 mm
Display digit height - smallest digit	4 mm
Display digit height	15 mm
Languages of the user interface	English

Construction

Dimension housing (W×D×H)	210×340×330 mm
Dimensions completely mounted (W×D×H)	210×340×330 mm
Dimensions rectangular draught shield - inner (W×D×H)	160×170×225 mm
Dimensions rectangular draught shield - outer (W×D×H)	172×185×245 mm
Dimensions weighing surface (Ø)	80 mm
Dimensions weighing surface	80 mm
Material housing	plastic
Material weighing plate	stainless steel
Material draught shield	glass
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,1 Nm

Functions

PreTare function	✓
Recipe/summing level	Rez B (Net-total, memory with plain text designations + setpoint, also for printout)
Recipe weighing - number of database entries	99
Recipe weighing - number of ingredients per database entry	20
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	None

KERN ALS 250-4A



Analytical balance with high weighing capacity, graphic display and convenient recipe function

Function for averaging under unstable weighing conditions	✓
Capacity - Display	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	250.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	1 mg
Smallest piece weight when piece counting - normal conditions	10 mg
Reference quantity	10, 25, 50, 100, n (any number of pieces)
Auto-off interval(s) in mains power mode	off 5 min 2 min 15 min
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 standard
EasyTouch (ET) - Connection type	über alle verfügbare Schnittstellen möglich

Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO AUS UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Input voltage power supply / power [Max]	country dependent
Input voltage device / power [Max]	24 V 1 A

Environmental conditions

Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %
Storage temperature [Max]	40 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkkS calibration	963-101
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	400×515×615 mm
Shipping method	Parcel service
Net weight approx.	7 kg
Gross weight approx.	9 kg
Shipping weight	25,3 kg

Pictograms

STANDARD



OPTION

