
KERN **DLB 60-4A**

Moisture analyzer with intuitive graphic display, particularly suitable for plastic granulate

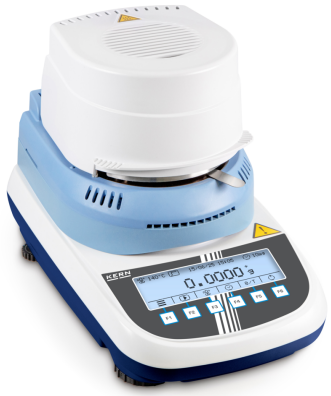

Date of creation: 25.10.2026

Category

Brand	KERN
Product category	Laboratory balance
Product group	Moisture analyzer
Product family	DLB

Measuring System

Weighing system	Force compensation
Weighing capacity [Max]	60 g
USP Minimum weight of sample (k = 2, U = 0.1%)	200 mg
Readability [d]	0,0001 g
Reproducibility	0,0001 g
Linearity	± 0,0006 g
Resolution	600.000
Tare range	60 g
Adjustment options	Adjusting with external weight
Recommended adjusting weight	20 g (E2)
Possible calibration points	20 g
Stabilization time	4 s
Eccentric loading at 1/3 [Max]	0,0005 g
Reproducibility weight of sample 10 g	0,05%
Temperature increment	1 °C
Construction type of the scale	Single-range balance
Reproducibility weight of sample 2 g	0,18%
Units	g mg % rH % Dry mass
Temperature [Min] (°C)	35 °C
Temperature [Max] (°C)	160 °C
Readability moisture [d] (%)	0,001%
Maximum creep (15 minutes)	1 mg
Maximum creep (30 minutes)	2 mg
Default unit	g
Temperature calibration points	80 °C;150 °C
Warm-up time	4 h
Possible moisture content of the sample	0,01% - 100%
Possible dry content of the sample	100% - 0,01%

Display

Display type	LCD graphic
Display type	LCD Graphic
Display backlight	✓
Display screen size	132×38 mm
Display digit height - smallest digit	4 mm
Display digit height	11 mm
Languages of the user interface	German English French Spanish Italian Portuguese

Construction

Dimension housing (W×D×H)	215×345×235 mm
Dimensions weighing surface (Ø)	100 mm
Dimensions weighing surface	100 mm
Material housing	plastic
Material display housing	plastic
Level indicator	✓
Levelling feet adjustable	✓
Heat generation capacity (W)	400

Functions

Standby function	✓
Auto-off interval(s) in mains power mode	1 min - 99 min
Tare function	manual (multi)
Number of keys for operation	6
Drying modes	Standard drying Rapid drying

KERN **DLB 60-4A**

Moisture analyzer with intuitive graphic display, particularly suitable for plastic granulate

Switch-off criteria	time controlled automatic manual

Interface

Interfaces	RS-232 standard

Power Supply

Supplied power supply	Power supply unit
Power supply type	Built-in power supply
Plug-in power supply / adapter for countries - included with the delivery	EURO
Plug-in power supply / adapter for countries - optional	UK CH
Input voltage power supply / power [Max]	220 V - 240 V AC; 50 Hz, 60 Hz
Power socket for mains adapter	Power supply cable
Battery capacity	210 mAh
Battery voltage	3 V
Battery – Number of cells	1
Battery – Individual weight	2,9 g
Battery – Total weight	2,9 g
Battery capacity (Wh)	0,63 Wh
Battery – Lithium content	66 mg

Environmental conditions

Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C
Humity of environment [Min]	45 %
Humity of environment [Max]	70 %

Services (optional)

Article number for DAkkS calibration	963-103
Article number for factory calibration (temperature)	964-305
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	420×310×370 mm
Shipping method	Parcel service
Net weight approx.	4,8 kg
Gross weight approx.	7 kg
Shipping weight	9,6 kg
Shipping volume weight	9,6 kg

Product information

GTIN/EAN number	4045761492752
Trade number	90160010
Warranty Time	36 mon

Pictograms

STANDARD



OPTION

