


# KERN EWJ 3000-2

High-quality precision balance with automatic internal adjustment, verification optional

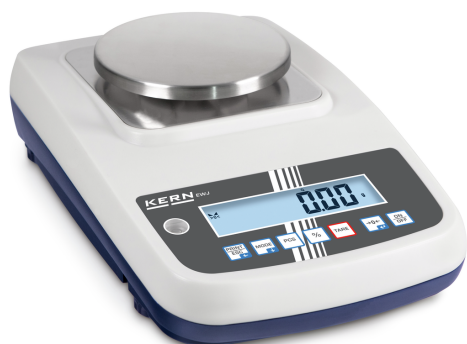

## Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	EWJ

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	3000 g
Readability [d]	0,01 g
Reproducibility	0,03 g
Linearity	± 0,05 g
USP Minimum weight of sample (k = 2, U = 0.1%)	60 g
Resolution	300.000
Adjustment options	Internal calibration (automatic)
Recommended adjusting weight	3 kg (F1)
Possible calibration points	1 kg; 2 kg; 3 kg
Automatic adjustment - Standard time interval	2 h
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,04 g
Maximum creep (15 minutes)	100 mg
Maximum creep (30 minutes)	200 mg
Default unit	g
Units	kg
	g
	gn
	dwt
	tl (Tw)

	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	mo
	lb
	oz
	ffa
	tol
	m
Loadcell type	aluminium IP65 silicone-coated

## Display

Display type	LCD
Display backlight	✓
Display screen size	129 x 27
Display digit height	21 mm
Languages of the user interface	English Symbol language

## Construction

Dimension housing (W×D×H)	220×340×105 mm
Dimensions weighing surface (Ø)	135 mm
Dimensions weighing surface	135 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material load cell(s)	aluminium
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,1 Nm

## Functions

PreTare function	✓
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Capacity - Display	✓
Counting function	✓
Counting resolution (laboratory conditions)	150.000
Counting reference weight can be entered	✓

# KERN EWJ 3000-2



High-quality precision balance with automatic internal adjustment, verification optional

Smallest piece weight when piece counting - laboratory conditions	20 mg
Smallest piece weight when piece counting - normal conditions	200 mg
Reference quantity	5, 10, 20, 50, free, Input
Hold function	✓
IP protection - display	no IP protection
IP protection - load cell	IP65
Auto-off interval(s) in battery mode/rechargeable battery mode	5 min
	2 min
	1 min
	30 min
	60 min
	30 sec
Tare function	manual (multi)
Number of keys for operation	7

## Interface

Interfaces	RS-232 standard Bluetooth BTC (v2.0) (optional, factory) Bluetooth BLE (v4.0) (optional, factory) USB-Device
------------	---

## Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Battery / accumulator type	Li-Ion
Battery connection	2-pole tub connector
Rechargeable battery operating time - backlight on	32 h
Rechargeable battery operating time - backlight off	57 h
Rechargeable battery charging time	6,5 h
Rechargeable battery optional	Rchrg. battery optional - intern

## Environmental conditions

Ambient temperature [Min]	10 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %

## Approval

CE mark	✓
---------	---

## Services (optional)


Article number for DAkkS calibration	963-127
Article number for certificate of conformity (verification)	969-517

## Packing & Shipping

Delivery time	1 d
Dimensions packaging (WxDxH)	410x295x275 mm
Net weight	3,17 kg
Shipping method	Parcel service
Net weight approx.	3,2 kg
Gross weight approx.	4,6 kg
Shipping weight	6,7 kg

## Pictograms

### STANDARD

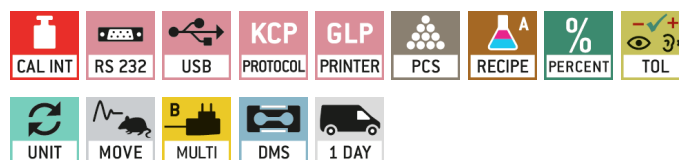

### OPTION



### FACTORY

