

KERN FKB 65K1

High resolution bench scale with large weighing range and robust stainless steel weighing plate



Display

Display type	LCD
Display backlight	✓
Display screen size	120×38 mm
Display digit height	25 mm
Languages of the user interface	English Symbol language

Construction

Dimension housing (W×D×H)	350×390×120 mm
Dimensions weighing surface (W×D)	340×240 mm
Dimensions weighing surface	340×240 mm
Dimensions weighing platform (W×D×H)	340×240×21 mm
Material housing	ABS plastic
Material weighing plate	stainless steel
Material display housing	plastic
Level indicator	✓
Levelling feet adjustable	✓

Functions

Recipe/summing level	Sum A
Percentage determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Hook (included in delivery)
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Counting resolution (laboratory conditions)	65.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	1 g
Smallest piece weight when piece counting - normal conditions	10 g
Reference quantity	5, 10, 20, 50, n (any number of pieces)
IP protection - display	no IP protection
	5 min
	2 min
Auto-off interval(s) in battery mode/rechargeable battery mode	1 min
	30 min
	60 min
	30 sec

Category

Brand	KERN
Product category	Industrial scale
Product group	Bench scale
Product family	FKB

Measuring System

Weighing system	Strain gauge
Weighing capacity [Max]	65 kg
Readability [d]	0,001 kg
Reproducibility	0,001 kg
Linearity	± 0,003 kg
Resolution	65.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	60 kg (F2)
Possible calibration points	20 kg; 40 kg; 60 kg
Stabilization time	3 s
Eccentric loading at 1/3 [Max]	0,005 kg
Construction type of the scale	Single-range balance

Units	kg
	g
	gn
	dwt
	ozt
	lb
	oz
	ffa
	PCS
	%
Maximum creep (15 minutes)	10 g
Maximum creep (30 minutes)	20 g
Default unit	kg

KERN FKB 65K1



High resolution bench scale with large weighing range and robust stainless steel weighing plate

Auto-off interval(s) in mains power mode	off
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 (optional) Ethernet (optional) Bluetooth BLE (v4.0) (optional) USB-Device (optional) KUP WiFi (optional)
------------	--

compatible with EasyTouch	✓
---------------------------	---

Power Supply

Supplied power supply	Power supply & battery function (battery not included)
-----------------------	--

Power supply type	Power adapter
-------------------	---------------

Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
---	------------------------

Plug-in power supply / adapter for countries - optional	EURO UK US CH
---	------------------------

Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
--	------------------------------

Power supply cable removable	removable
------------------------------	-----------

Input voltage device / power [Max]	5,9V, 1A
------------------------------------	----------

Power socket for mains adapter	Hollow plug, inside plus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 13 mm
--------------------------------	---

Battery / accumulator type	Li-Ion
----------------------------	--------

Battery	4× 1.5 V AA
---------	-------------

Battery connection	Battery insert
--------------------	----------------

Battery operating time	20 h
------------------------	------

Rechargeable battery operating time - backlight on	24 h
--	------

Rechargeable battery operating time - backlight off	48 h
---	------

Rechargeable battery charging time	8 h
------------------------------------	-----

Rechargeable battery optional	Rchrg. battery optional - intern
-------------------------------	----------------------------------

Environmental conditions

Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkKS calibration	963-129
--------------------------------------	---------

Article number for certificate of conformity	969-517
--	---------

Packing & Shipping

Delivery time	1 d
---------------	-----

Dimensions packaging (W×D×H)	470×470×190 mm
------------------------------	----------------

Shipping method	Parcel service
-----------------	----------------

Net weight approx.	7 kg
--------------------	------

Gross weight approx.	8 kg
----------------------	------

Shipping weight	8,4 kg
-----------------	--------

Product information


GTIN/EAN number	4045761312395
-----------------	---------------

Trade number	84238220
--------------	----------

REACH classification	no prohibited substances
----------------------	--------------------------

Pictograms

STANDARD

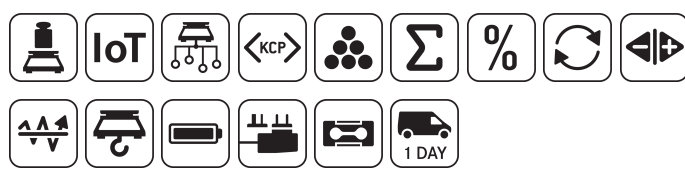

OPTION

