KERN **IXC 100K-2LM-EX2**

Comfort and safety combined: Stainless steel platform scale with intuitive operation for hazardous areas, as an option with external rechargeable battery pack and verification



Date of creation: 24.10.2026

Category	
Brand	KERN
Product category	Industrial scale
Product group	Platform scale
Product family	IXC-EX2

Measuring System	
Weighing system	Strain gauge
Number of weighing ranges	2
Weighing capacity [Max]	60 kg; 150 kg
Readability [d]	20 g; 50 g
Reproducibility	20 g; 50 g
Linearity	± 20 g; 50 g
Minimum weight [Min] (verifiable)	400 g; 1 kg
Resolution	3.000, 3.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	150 kg (M1)
Possible calibration points	60 kg; 150 kg
Stabilization time	3 s
Eccentric loading at 1/3 [Max]	20 g; 50 g
Conformity assessment possible	✓
Construction type of the scale	Multi-range balance
Units (if device is conformity assessed)	kg g
Load cell connection	6-wire
Default unit	kg
Loadcell type	aluminium IP65 silicone-coated
Warm-up time	10 min; 10 min

Display	
Display type	LCD
Display type	LCD with backlight
Display backlight	✓
Display screen size	160×60 mm
Display segments	6
Display digit height	48 mm
Languages of the user interface	English Symbol language

Construction	
Dimension display device (W×D×H)	237,5×162,5×78 mm
Dimensions weighing surface (W×D)	650×500 mm
Dimensions weighing surface	650×500 mm
Dimensions weighing platform (W×D×H)	650×500×139 mm
Material weighing plate	stainless steel
Material platform	steel, powder-coated
Material display housing	stainless steel
Material load cell(s)	aluminium
Level indicator	✓
Levelling feet adjustable	✓
Wall mount	✓
Display device cable length	2,7 m
Platform Construction	Single-Cell

Functions	
Use in potentially explosive areas possible	✓
IP protection - display	IP65 / IP69
IP protection - load cell	IP65
Percentage determination	✓
Sum memory function	✓
Function for averaging under unstable weighing conditions	✓
Tolerance weighing	✓
Counting function	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	off 30 s, 1 min, 2 min, 5 min, 30 min, 60 min
Auto-off interval(s) in mains power mode	off
Tare function	manual (multi)
Counting resolution (laboratory conditions)	30.000

KERN **IXC 100K-2LM-EX2**

Comfort and safety combined: Stainless steel platform scale with intuitive operation for hazardous areas, as an option with external rechargeable battery pack and verification

Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	5 g
Reference quantity	5, 10, 20, 50, n (any number of pieces)
Recipe/summing level	Sum A
Alibi memory	optional internal memory
Alibi memory - number of memory spaces	250.000
Number of keys for operation	7
Smallest piece weight when piece counting - normal conditions	50 g
Tolerance weighing - type of signal	acoustically visual

Interface

Interfaces	RS-232 (optional) Ethernet (optional) WiFi (optional, factory) Alibi memory (optional, factory) analogue (0 - 10 V) (optional) analogue (4 - 20 mA) (optional) Bluetooth BLE (v4.0) (optional, factory) USB-Device (optional)
compatible with EasyTouch	✓

Power Supply

Supplied power supply	Power supply unit
Input voltage power supply / power [Max]	100 - 240 VAC, 0.12A
Input voltage device / power [Max]	100 - 240 VAC, 0.12A
Power socket for mains adapter	Cable permanently installed
Battery / accumulator type	Li-Ion
Battery	no battery
Battery connection	Connector pin
Rechargeable battery	3,7V 10Ah
Rechargeable battery operating time - backlight on	60 h
Rechargeable battery operating time - backlight off	160 h
Rechargeable battery charging time	6 h
Rechargeable battery optional	Rchrg. battery optional (factory)

Environmental conditions

Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humity of environment [Max]	80 %

Services (optional)

Article number for adjustment at the location of installation	961-249
Article number for conformity assessment	965-229
Article number for DAkkS calibration	963-129
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	4 d
Dimensions packaging (W×D×H)	670×1050×245 mm
Shipping method	Parcel service
Net weight approx.	20 kg
Gross weight approx.	26 kg
Shipping weight	34,5 kg
Shipping volume weight	34,5 kg

Product information


GTIN/EAN number	4045761487079
Trade number	84238220
Warranty Time	36 mon
REACH classification	no prohibited substances

KERN **IXC 100K-2LM-EX2**

Comfort and safety combined: Stainless steel platform scale with intuitive operation for hazardous areas, as an option with external rechargeable battery pack and verification

Pictograms

STANDARD

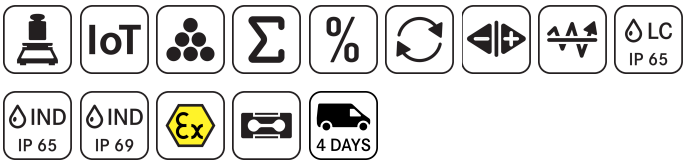

OPTION



FACTORY

