
KERN **MPE 200K-1HEM**

High quality personal floor scale with BMI function, height rod, and medical certification for clinical use, verification optional

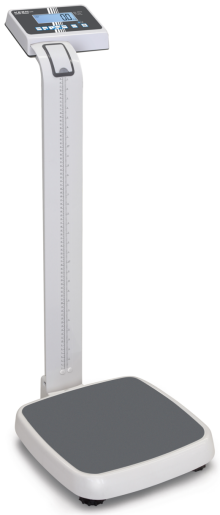

Date of creation: 14.11.2026

Category	
Brand	KERN
Product category	Medical scale
Product group	Personal floor scale
Product family	MPE-E

Measuring System	
Weighing system	Strain gauge
Weighing capacity [Max]	250 kg
Measuring range measuring rod (cm)	3- 80cm @ 0,1cm ± 0,5cm 89-205cm @ 0,1cm ± 1cm
Readability [d]	0,1 kg
Reproducibility	0,1 kg
Linearity	± 0,1 kg
Minimum weight [Min] (verifiable)	2 kg
Resolution	2.500
Tare range	249,9 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	200 kg (M1)
Stabilization time	3 s
Eccentric loading at 1/3 [Max]	0,1 kg
Conformity assessment possible	✓
Construction type of the scale	Single-range balance
Units	kg
Units (if device is conformity assessed)	kg
Default unit	kg
Warm-up time	10 min

Display	
Display type	LCD
Display backlight	✓
Display digit height - smallest digit	5 mm
Display digit height	25 mm
Languages of the user interface	Symbol language

Construction	
Dimensions completely mounted (W×D×H)	365×570×2134 mm
Dimension display device (W×D×H)	200×55×128 mm
Dimensions weighing surface (W×D)	365×360 mm
Dimensions weighing surface	365×360 mm
Dimensions weighing platform (W×D×H)	365×360×80 mm
Material housing	steel, lacquered
Material weighing plate	plastic
Material display housing	plastic
Level indicator	✓
Stand height	940 mm
Display device cable length	1,8 m

Functions	
Function for BMI calculation	✓
Hold function	✓
Function for averaging under unstable weighing conditions	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min 5 min 30 min 15 min
Auto-off interval(s) in mains power mode	3 min 5 min 30 min 15 min
Tare function	manual (single & multi)
Number of keys for operation	7

Interface	
Interfaces	RS-232 standard

Power Supply	
Supplied power supply	Battery

KERN **MPE 200K-1HEM**

High quality personal floor scale with BMI function, height rod, and medical certification for clinical use, verification optional

Power supply type	Power adapter
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	12 V, 500 mA
Battery / accumulator type	Alkali(-Manganese)
Battery	6×1.5 V AA
Battery connection	Battery insert
Battery operating time	20 h
Battery capacity	2.700 mAh
Battery voltage	18 V
Battery – Number of cells	12
Battery – Individual weight	22,6 g
Battery – Total weight	271,2 g
Battery – Construction	Individual cells
Battery capacity (Wh)	4,05 Wh
Battery – Lithium content	0 g
Rechargeable battery	MBC-A08
Rechargeable battery operating time - backlight on	20 h
Rechargeable battery operating time - backlight off	40 h
Rechargeable battery charging time	12 h
Rechargeable battery optional	Rchrg. battery optional - intern
Battery/Accu connected	not connected, enclosed

Environmental conditions

Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humity of environment [Min]	5 %
Humity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
Conformity assessment possible ex works	✓
Accuracy classe	III
Verification scale interval [e]	0,1 kg
Approval in accordance with 2017/745 (MDR, med.)	✓

Services (optional)

Article number for adjustment at the location of installation	961-249
Article number for conformity assessment	965-129
Article number for DAkkS calibration	963-129
Article number for certificate of conformity	969-517

Packing & Shipping


Delivery time	1 d
Dimensions packaging (W×D×H)	1010×290×445 mm
Shipping method	Parcel service
Net weight approx.	12 kg
Gross weight approx.	14 kg
Shipping weight	26,1 kg
Shipping volume weight	26,1 kg

Product information


GTIN/EAN number	4045761213500
Trade number	84231090
Warranty Time	36 mon
REACH classification	no prohibited substances

Pictograms

STANDARD



OPTION



FACTORY



CE 0297