

# KERN NFN 1.5T-4M

# KERN

Stainless steel drive-through scale (IP68) with stainless steel display device (IP65), verification optional



Display backlight	✓
Display screen size	165×64 mm
Display digit height	52 mm
Languages of the user interface	Symbol language

## Construction

Dimension display device (W×D×H)	266×165×96 mm
Dimensions weighing surface (W×D)	1000×1000 mm
Dimensions weighing surface	1000×1000 mm
Dimensions weighing platform (W×D×H)	1600×1200×80 mm
Material weighing plate	stainless steel
Material platform	stainless steel (SUS304)
Material display housing	stainless steel
Material load cell(s)	Stainless steels
Level indicator	✓
Levelling feet adjustable	✓
Stand inclinable	✓
Wall mount	✓
Cable length	5 m
Display device cable length	5 m
Allowed cable length display device [Max]	30 m
Platform Construction	Welded load plate; smooth surface
Load cells - number	4

## Functions

Sum memory function	✓
Recipe/summing level	Sum A
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Reference quantity	10, 20, 50, 100, 200
IP protection - display	IP65
IP protection - load cell	IP68
Auto-off interval(s) in battery mode/rechargeable battery mode	selectable
Auto-off interval(s) in mains power mode	selectable
Tare function	manual (single & multi)
Number of keys for operation	7

## Category

Brand	KERN
Product category	Industrial scale
Product group	Drive-through scale
Product family	NFN

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Number of weighing ranges	1
Weighing capacity [Max]	1500 kg
Readability [d]	0,5 kg
Reproducibility	0,5 kg
Linearity	± 0,5 kg
Minimum weight [Min]	10 kg
Resolution	3.000
Tare range	-1500 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	1500 kg (M1)
Stabilization time	2 s
Warm-up time	10 min
Eccentric loading at 1/3 [Max]	0,5 kg
Default unit	kg
Units	kg
Units (if device is conformity assessed)	kg
Loadcell type	ZEMIC BM8H 1 ton
Load cell connection	4-wire

## Display

Display type	LCD
--------------	-----

# KERN NFN 1.5T-4M

Stainless steel drive-through scale (IP68) with stainless steel display device (IP65), verification optional

## Interface

Interfaces	RS-232 (optional, factory)
	Bluetooth BTC (v2.0) (optional, factory)
EasyTouch (ET) - Connection type	analogue (0 - 10 V) (optional, factory)
	analogue (4 - 20 mA) (optional, factory)
RS232 (+optionale Schnittstellen)	

## Power Supply

Supplied power supply	Accu & Power supply
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	AUS
	UK
	US
CH	

Input voltage power supply / power [Max]	110 V - 230 V AC
Input voltage device / power [Max]	12 V, 500 mA
Battery / accumulator type	Pb
Battery	no battery
Rechargeable battery	6 V, 4 Ah
Rechargeable battery operating time - backlight on	20 h
Rechargeable battery operating time - backlight off	35 h
Rechargeable battery charging time	12 h

## Environmental conditions

Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %

## Approval

CE mark	✓
Conformity assessment possible ex works	✓
Accuracy classe	III
Verification scale interval [e]	0,5 kg

## Services (optional)


Article number for adjustment at the location of installation	961-250
Article number for conformity assessment	965-230
Article number for DAkkS calibration	963-130
Article number for certificate of conformity (verification)	969-517

## Packing & Shipping

Delivery time	2 d
Dimensions packaging (W×D×H)	1645×1305×340 mm
Net weight	105 kg
Shipping method	Freight
Net weight approx.	105 kg
Gross weight approx.	195 kg
Shipping weight	191 kg

## Pictograms

### STANDARD

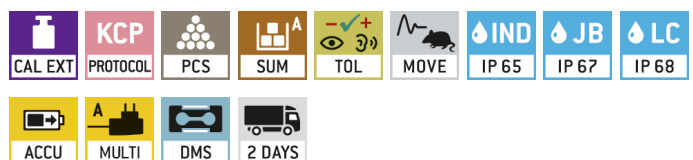

### OPTION



### FACTORY

