


KERN PLJ 2000-3A

Range of precision balances with enormous weighing capacities – ideal for heavy tare containers or large samples

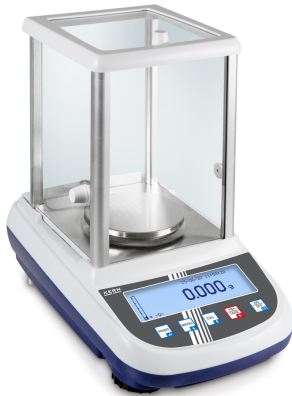

tl (Tw)
tl (HK)
ozt
tl (Singap, Malays)
ct
mo
lb
oz

Display	
Display type	LCD graphic
Display backlight	✓
Display screen size	132×38 mm
Display digit height - smallest digit	4 mm
Display digit height	15 mm
Languages of the user interface	English

Construction	
Dimension housing (W×D×H)	210×340×330 mm
Dimensions completely mounted (W×D×H)	210×340×330 mm
Dimensions rectangular draught shield - inner (W×D×H)	160×170×225 mm
Dimensions rectangular draught shield - outer (W×D×H)	172×185×245 mm
Dimensions weighing surface (Ø)	110 mm
Dimensions weighing surface	110 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material draught shield	glass
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,1 Nm

Functions	
PreTare function	✓
Recipe/summing level	Rez B (Net-total, memory with plain text designations + setpoint, also for printout)
Recipe weighing - number of database entries	99
Recipe weighing - number of ingredients per database entry	20
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓

Category	
Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PLJ

Measuring System	
Construction type of the scale	Single-range balance
Weighing system	Force compensation
Weighing capacity [Max]	2100 g
Weighing capacity [Max] (ct)	10500 ct
Readability [d]	0,001 g
Reproducibility	0,002 g
Linearity	± 0,004 g
USP Minimum weight of sample (k = 2, U = 0.1%)	4 g
Resolution	2.100.000
Tare range	2100 g
Adjustment options	Internal calibration (automatic)
Recommended adjusting weight	2 kg (E2)
Automatic adjustment - Standard temperature deviation	1,2 °C
Stabilization time	2 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,005 g
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg
Default unit	g
Units	g mg gn dwt

KERN PLJ 2000-3A



Range of precision balances with enormous weighing capacities – ideal for heavy tare containers or large samples

Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Eye (included in delivery)
Function for averaging under unstable weighing conditions	✓
Time display	✓
Capacity - Display	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	42.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	50 mg
Smallest piece weight when piece counting - normal conditions	500 mg
Reference quantity	10, 25, 50, 100, n (any number of pieces)
Auto-off interval(s) in mains power mode	off 5 min 2 min 15 min
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 standard
EasyTouch (ET) - Connection type	über alle verfügbare Schnittstellen möglich

Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO AUS UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	24 V 1 A

Environmental conditions

Ambient temperature [Min]	15 °C
Ambient temperature [Max]	35 °C

Humidity of environment [Max]	80 %
Storage temperature [Max]	40 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkkS calibration	963-103
Article number for certificate of conformity (verification)	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	515×400×615 mm
Shipping method	Parcel service
Net weight approx.	7 kg
Gross weight approx.	8 kg
Shipping weight	25,3 kg

Pictograms

STANDARD



OPTION

