


KERN PLS 20000-1F

KERN

High-quality precision scale with comfortable graphic display and enormous weighing range

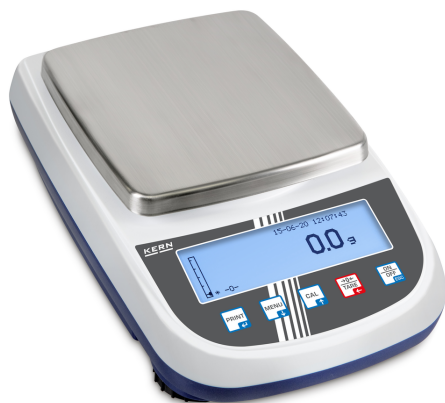

tl (Singap, Malays)
ct
mo
lb
oz

Display

Display type	LCD graphic
Display backlight	✓
Display screen size	132×38 mm
Display digit height - smallest digit	4 mm
Display digit height	15 mm
Languages of the user interface	English

Construction

Dimension housing (W×D×H)	210×340×120 mm
Dimensions completely mounted (W×D×H)	210×340×120 mm
Dimensions weighing surface (W×D)	200×175 mm
Dimensions weighing surface	200×175 mm
Dimensions weighing platform (W×D×H)	200×175×15 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Level indicator	✓
Levelling feet adjustable	✓

Functions

PreTare function	✓
Recipe/summing level	Rez B (Net-total, memory with plain text designations + setpoint, also for printout)
Recipe weighing - number of database entries	99
Recipe weighing - number of ingredients per database entry	20
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Eye (included in delivery)
Function for averaging under unstable weighing conditions	✓
Time display	✓
Capacity - Display	✓

Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PLS

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	20000 g
Weighing capacity [Max] (ct)	100000 ct
Readability [d]	0,1 g
Readability carat [d] (ct)	1 ct
Reproducibility	0,1 g
Linearity	± 0,4 g
USP Minimum weight of sample (k = 2, U = 0.1%)	200 g
Resolution	200.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	20 kg (E2)
Possible calibration points	20 kg; 10 kg
Stabilization time	3 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,4 g
Maximum creep (15 minutes)	1 g
Maximum creep (30 minutes)	2 g
Default unit	g

Units	g
	dwt
	tl (Tw)
	tl (HK)
	ozt

KERN PLS 20000-1F



High-quality precision scale with comfortable graphic display and enormous weighing range

Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	40.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	500 mg
Smallest piece weight when piece counting - normal conditions	5 g
Reference quantity	10, 25, 50, 100, n (any number of pieces)
Auto-off interval(s) in mains power mode	off 5 min 2 min 15 min
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 standard
EasyTouch (ET) - Connection type	über alle verfügbare Schnittstellen möglich

Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO AUS UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	9 V DC, 1000 mA

Environmental conditions

Ambient temperature [Min]	15 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %

Approval

CE mark	✓
---------	---

Services (optional)


Article number for DAkkS calibration	963-128
Article number for certificate of conformity (verification)	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	450×320×300 mm
Shipping method	Parcel service
Net weight approx.	3,2 kg
Gross weight approx.	4,4 kg
Shipping weight	8,6 kg

Pictograms

STANDARD

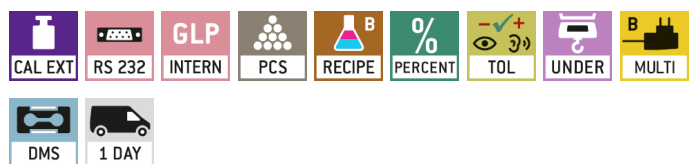

OPTION

