

PROFESSIONAL MEASURING



23

**DIGITAL
REFRACTOMETERS
TYPE: HAND-HELD**

KERN Pictograms



360° rotatable microscope head



Monocular Microscope
For the inspection with one eye



Binocular Microscope
For the inspection with both eyes



Trinocular Microscope
For the inspection with both eyes and the additional option for the connection of a camera



Abbe Condenser
With high numerical aperture for the concentration and the focusing of light



Halogen illumination
For pictures bright and rich in contrast



LED illumination
Cold, energy-saving and especially long-life illumination



Incident illumination
For non-transparent objects



Transmitting illumination
For transparent objects



Fluorescence illumination
For stereomicroscopes



Fluorescence illumination for compound microscopes
With 100 W mercury lamp and filter



Fluorescence illumination for compound microscopes
With 3 W LED illumination and filter



Phase contrast unit
For a higher contrast



Darkfield condenser/unit
For a higher contrast due to indirect illumination



Polarising unit
To polarise the light



Infinity system
Infinity corrected optical system



Zoom magnification
For stereomicroscopes



Auto-focus
For automatic control of the focus level



Parallel optical system
For stereomicroscopes, enables fatigue-proof working



Integrated scale
In the eyepiece



SD card
For data storage



USB 2.0 digital camera
For direct transmitting of the picture to a PC



USB 3.0 digital camera
For direct transmitting of the picture to a PC



WLAN data interface:
For transmitting of the picture to a mobile display device



HDMI digital camera
For direct transmitting of the picture to a display device



PC software
To transfer the measurements from the device to a PC.



Automatic temperature compensation
For measurements between 10 °C and 30 °C



Protection against dust and water splashes IPxx:
The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989+A1:1999+A2:2013



Battery operation
Ready for battery operation. The battery type is specified for each device.



Battery operation rechargeable
Prepared for a rechargeable battery operation



Plug-in power supply
230V/50Hz in standard version for EU. On request GB, AUS or USA version.



Integrated power supply unit
Integrated in microscope. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.



Package shipment
The time required to manufacture the product internally is shown in days in the pictogram.

Abbreviations

C-Mount	Adapter for the connection of a camera to a trinocular microscope
FPS	Frames per second
H(S)WF	High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)
LWD	Long Working Distance
N.A.	Numerical Aperture

SLR camera	Single-Lens Reflex camera
SWF	Super Wide Field (Field number at least \varnothing 23 mm for 10× eyepiece)
W.D.	Working Distance
WF	Wide Field (Field number up to \varnothing 22 mm for 10× eyepiece)

Why you should choose a KERN microscope now!

For 175 years, KERN & SOHN has been synonymous with high precision weighing and measuring technology. This claim is the driving force for the development of our microscope and refractometer ranges.

Thanks to consistent customer focus paired with smart ideas and the latest available technology we are proud to be suppliers of high-quality, durable top microscopes and refractometers, which help you to be as efficient as possible in your daily work.

When developing our microscopes we have concentrated on the very best optical quality and have used only high-quality glass and the latest technologies to achieve this. The high-quality Philips halogen and modern LED illumination produce razor-sharp images with high contrast and which will impress you with their brilliant true-colour display – you must have noticed this yourself.

Your advantages:

- all mechanical parts have been designed for a long service life
- special attention has been given to the ergonomics of our microscopes, as this allows the user to work for several hours in a comfortable position which does not cause fatigue
- our microscopes are fully-equipped and can be used immediately
- Highlight for 2022: die KERN camera software – you will be amazed at how user-friendly and intuitive it is, a high-quality tablet camera as well as a comprehensive range of calibration services for refractometers
- and much more...

Use our practical “Check list for microscopes and refractometers”, which may help you to quickly determine specifications for the future instrument. Together with our KERN product specialist you can choose the right product for you.

If there is no suitable product in the standard range, for example, then we will of course configure an individual microscope for you.

Our aim is to develop a market-driven product solution, so with our microscope and refractometer range, the saying holds true: good quality at a competitive price! This is what we stand for and work towards, every day!

With our current 2022 product range you can benefit from improved quality and a clear reduction in price, which we have been able to achieve through more efficient production methods and increased global sales of our microscopes and refractometers and of course we pass this straight on to you

Do you have any questions about our range of microscopes and refractometers?

Your KERN customer consultants are available at any time to help you further.

I hope that you enjoy working efficiently with our KERN Optics products.



Albert Sauter, Managing Director

Your advantages

fast

- 24 hour dispatch service for products in stock – order today, on its way tomorrow
- Sales & service hotline from 8:00 am to 5:00 pm

reliable

- Up to 3 years warranty
- Certified QM system
DIN EN ISO 9001

versatile

- One-stop shopping: from microscope through to refractometer – everything from one supplier
- Quick as a flash, find the product you want with the “Quick-Finder” at www.kern-sohn.com



Order hotline

+49 7433 9933-0



E-mail order

info@kern-sohn.com



www.kern-sohn.com

Information on current product availability, product data sheets, user instructions, useful knowledge, technical glossary and much for you to download, practical topic areas, which will guide you to the right product in your industry as well as a microscopes and refractometers search engine.



Service hotline

+49 7433 9933-199



Our team of consultants will assist you

from Monday to Friday
from 8:00 am to 5:00 pm



Online shop

www.kern-sohn.com

NEW



Transport and storage case



Rear view, screw-on battery compartment cover

Digital measurement of refraction index for universal application


Features

- The KERN ORM refractometers are accurate and universal maintenance free digital handheld refractometers
- They are characterized by their easy-using and robustness
- The typical and practical design is suitable for a quick and convenient everyday use
- The large, easy-to-read display with integrated temperature display supports the user to reliably determine the measurement
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument
- Rapid, user-friendly calibration of the refractometer is possible at any time using standard commercial distilled water
- The refractometers from the KERN ORM range are protected to international IP65 protection class, against dust and water splashes. After use, you can rinse the refractometer under running water
- Mean value measurements possible
- The following accessory-parts are included:
 - Prism cover lid
 - Pipette
 - Storage box
 - 1 x AAA battery
 - Screwdriver

Technical data

- Measurement temperature: 0 °C – 40 °C
- Overall dimensions W×D×H 121×58×25 mm
- Net weight approx. 289 g
- Power supply: 1 x AAA (1,5 V)
- Lifetime of the battery: approx. 10.000 measurements
- ATC (Automatic Temperature Compensation)
- Minimum sample volume: 4 drops
- Automatic energy management (AUTO-OFF after 60 seconds)
- Mean value measurement (15 measurements)

! Also available with calibration certificate, see page 109!



Scope of application: Basic measurements for Brix and refractive index

The following models are particularly suitable for basic measurement where the result is required in Brix or refractive index. They are used to determine the sugar content in food or for monitoring processes in the industry (coolant monitoring, water-based mixtures). Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Industry: Monitoring of lubricants in machines and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 50BM	Brix	0 – 50 %	± 0,2 %	0,1 %	370,-
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 1RS	Brix	0 – 90 %	± 0,2 %	0,1 %	470,-
	Refractive index	1,3330 – 1,5177 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Sugar

The following models are particularly suitable for direct measurement of different types of sugar. These are used to determine the content of the respective type of sugar in water-based liquids. It is possible to switch between the four different scales.

The main scope of applications is:

- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1SU	Fructose	0 – 69 %	± 0,2 %	0,1 %	470,-
	Glucose	0 – 60 %	± 0,2 %	0,1 %	
	Brix	0 – 90 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,577 nD %	± 0,0003 nD	0,0001 nD	
ORM 2SU	Lactose	0 – 17 %	± 0,2 %	0,1 %	370,-
	Maltose	0 – 16 %	± 0,2 %	0,1 %	
	Dextran	0 – 11 %	± 0,2 %	0,1 %	
	Brix	0 – 50 %	± 0,2 %	0,1 %	

Scope of application: Honey

The following model is particularly suitable for the measurement of the water content in honey according to the International Honey Commission (IHC2002) and “degrees Baumé” to determine the relative density of liquids. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1HO	Brix	5 – 38 %	± 0,2 %	0,1 %	470,-
	Baumé	33 – 48 °Bé	± 0,2 °Bé	0,1 °Bé	
	Water content	0 – 90 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,5177 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Salt

The following models are particularly suitable to determine the concentration of NaCl (salt) in water and seawater. This is often used for the preparation and for the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Food industry
- Restaurants, and large-scale catering establishment, canteens
- Fisch farm



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1NA	Salt content (NaCl) %	0 – 28 %	± 0,2 %	0,1 %	370,-
	Salt content (NaCl) ‰	0 – 280 ‰	± 2 ‰	1 ‰	
	Spec. Gravity	1,000 – 1,220	± 0,002	0,001	
	Brix	0 – 28 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4100 nD	± 0,0003 nD	0,0001 nD	
ORM 1SW	Salt content seawater	0 – 100 ‰	± 2 ‰	1 ‰	370,-
	Chlorine content seawater	0 – 57 %	± 2 ‰	1 ‰	
	Spec. Gravity	1,000 – 1,070	± 0,002	0,1 %	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Beer/alcohol

The following models are particularly suitable for determining the sugar content of the original wort of beer in its unfermented state. The value can be read straightaway, without having to be converted, using the SG Wort and Degrees Plato scales. In addition, the percent by volume and percent by mass scales can be used to determine the alcohol content of clear spirits.

The main scope of applications is:

- Beer brewers
- Alcohol production



Modell	Skalen	Messbereich	Genauigkeit	Teilung	Preis zzgl. MwSt. ab Werk €
KERN					
ORM 1AL	Percentage by mass	0 - 72 %	± 1 %	1 %	370,-
	Percentage by volume	0 - 80 %	± 1 %	1 %	
	Brix	0 - 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 - 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 1BR	Plato	0 - 31 °P	± 0,3 °P	0,1	370,-
	SG Wort	1,000 - 1,130	± 0,002	0,1	
	Brix	0 - 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 - 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Wine

The following models are particularly suitable for the measurement of the sugar content in fruit. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Agriculture: Wine-growing (viticulture) and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Most Waage

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1WN	Oechsle	0 - 150 °Oe	± 2 °Oe	1 °Oe	370,-
	Percentage by volume	0 - 22 %	± 0,2 %	0,1 %	
	KMW (Babo)	0 - 25 °KMW	± 0,2 °KMW	0,1 °KMW	
	Brix	0 - 50 %	± 0,2 %	0,1 %	
ORM 2WN	Oechsle France	0 - 230 °Oe	± 2 °Oe	1 °Oe	370,-
	Percentage by volume	0 - 22 %	± 0,2 %	0,1 %	
	KMW (Babo)	0 - 25 °KMW	± 0,2 °KMW	0,1 °KMW	
	Brix	0 - 50 %	± 0,2 %	0,1 %	

Scope of application: Coffee

The following models are particularly suitable for measuring the dissolved solids (TDS) in coffee to determine or compare the strength of a cup of coffee. For roasting plants, the TDS% value is used to determine the solubility level of a roast and to control the quality. Alternatively the display can be switched to show Brix or the refractive index.



The main scope of applications is:

- Coffee industry
- Coffee roasting plants
- Coffee competitions

Modell	Skalen	Messbereich	Genauigkeit	Teilung	Preis zzgl. MwSt. ab Werk €
KERN					
ORM 1CO	Coffee TDS 1	0 – 25	± 0,2	0,1	370,-
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 2CO	Coffee TDS 2	0 – 25	± 0,2	0,01	370,-
	Brix	0 – 30	± 0,2	0,1	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.



The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)
- Veterinary

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1UN	Urine (spec. gravity)	1,000 – 1,050 sgU	± 0,001 sgU	0,001 sgU	370,-
	Serum protein	0 – 12 g / 100 ml	± 0,2 g / 100 ml	0,1 g / 100 ml	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 2UN	Urine (s. g. dog)	1,000 – 1,060 sgU	± 0,002 sgU	0,001 sgU	370,-
	Urine (s. g. cat)	1,000 – 1,060 sgU	± 0,002 sgU	0,001 sgU	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue®, glycol concentration (ethylene (EG) and propylene (PG)), battery fluid (BF), urea, the freezing point of windscreen wash water (CW). Furthermore these models are suitable for the measurement of thermal exchange systems. Alternatively the display can be switched to show Brix.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1CA	Wash water	(-60) – 0 °C	± 0,5 °C	0,1 °C	370,-
	AdBlue®	0 – 51 %	± 0,2 %	0,1 %	
	Battery fluid	1,000 – 1,500	± 0,005	0,1 %	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200	± 0,0003 nD	± 0,0001 nD	
ORM 2CA	Ethylene glycol (%)	0 – 100 %	± 0,5 %	0,1 %	470,-
	Ethylene glycol (°C)	(-50) – 0 °C	± 0,5 °C	0,1 °C	
	Propylene glycol (%)	0 – 100 %	± 0,5 %	0,1 %	
	Propylene glycol (°C)	(-60) – 0 °C	± 0,5 °C	0,1 °C	
	Brix	0 – 90 %	± 0,2 %	0,1 %	



Transport and storage case



Rear view, screw-on battery compartment cover



IP65: Protected against dust and water splashes

Digital refractive index measurement for laboratories and the industry for multi-application ► PREMIUM refractometer

Features

- The KERN ORF refractometers are accurate and universal maintenance free digital handheld refractometers
- The large display is easy to read. Mistakes in reading are avoided
- The typical and practical design is suitable for a quick and convenient everyday use and is characterized by its easy-using and robustness
- The PREMIUM refractometers from the KERN ORF range are protected to international IP65 protection class, against dust and water splashes. After use, you can rinse the refractometer under running water
- The large, easy-to-read TFT colour display with integrated temperature display supports the user to reliably determine the measurement
- A large selection of models is available with single or multiple scales. This allows the use in various applications
- The instrument comes with an optimized software that can show a result in different scales
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument
- Due to the fact that the refractometer has been calibrated at the factory, this guarantees that it can be used immediately for accurately measuring your sample.
- The following accessory-parts are included:
 - Calibration liquid
 - Pipette
 - Storage box
 - 2 × AAA batteries
 - Leather bag
 - Screwdriver
 - Cleaning tissue

Technical data

- Measurement temperature: 5 °C – 40 °C
- Overall dimensions W×D×H 145×67×40 mm
- Net weight approx. 200 g
- Power supply: 2 × AAA (1,5 V)
- Lifetime of the battery: approx. 3.750 measurements
- ATC (Automatic Temperature Compensation), does not apply to the refraction index scale
- Minimum sample volume: 2–3 drops
- Automatic energy management (AUTO-OFF after 90 seconds)

! Also available with calibration certificate, see page 109!

STANDARD



Only while stocks last

Remaining stocks of this series available at:
www.kern-sohn.com

Successor series ORM

→ see page 101


KERN & SOHN – The wide range of product champion that is situated in the Swabian Alb

KERN & SOHN GmbH
Balances, Test weights, Microscopes,
DAkKS calibration laboratory
Ziegelei 1
72336 Balingen
Germany
Tel. +49 7433 9933-0
info@kern-sohn.com



Printed in Germany by KERN & SOHN GmbH z-co-en-kp-20231

Discover the vast world of microscopes, cameras and refractometers from KERN online: kern-sohn.com

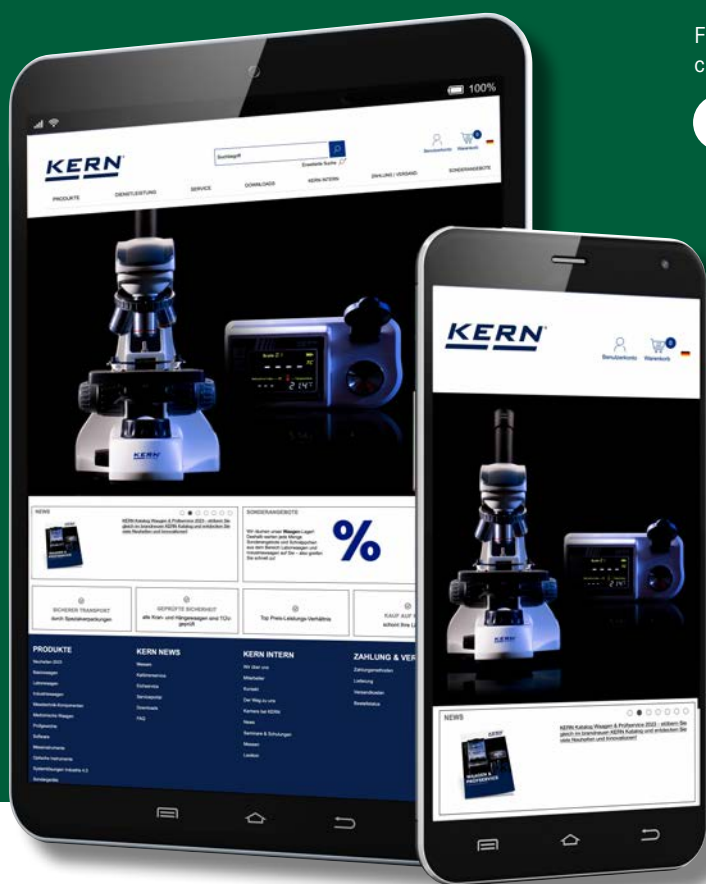

Follow us also on our social media
channels

