

KERN DE 12K1A

KERN

Versatile, successful model with stainless steel platform for flexible use



Maximum creep (30 minutes)	8 g
Default unit	g

Display	
Display type	LCD
Display backlight	✓
Display screen size	87×29 mm
Display digit height	25 mm

Construction	
Dimension housing (W×D×H)	318×305×75 mm
Dimension display device (W×D×H)	225×110×55 mm
Dimensions weighing surface (W×D)	315×305 mm
Dimensions weighing surface	315×305 mm
Dimensions weighing platform (W×D×H)	318×308×75 mm
Material weighing plate	stainless steel
Material platform	metal, lacquered
Material display housing	plastic
Display device cable length	1,4 m
Allowed cable length display device [Max]	3 m
Load cells - number	4

Functions	
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Underfloor weighing	None
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Counting resolution (laboratory conditions)	12.000
Smallest piece weight when piece counting - laboratory conditions	1 g
Smallest piece weight when piece counting - normal conditions	10 g
Reference quantity	5, 10, 20, 25, 50
IP protection - display	no IP protection
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min off
Tare function	manual (multi)
Number of keys for operation	5

Interface	
Interfaces	RS-232 standard

Category	
Brand	KERN
Product category	Industrial scale
Product group	Platform scale
Product family	DE

Measuring System	
Weighing system	Strain gauge
Weighing capacity [Max]	12000 g
Readability [d]	1 g
Reproducibility	1 g
Linearity	± 3 g
Resolution	12.000
Tare range	12000 g
Adjustment options	Adjusting with external weight
Recommended adjusting weight	12 kg (M1)
Possible calibration points	4 kg; 8 kg; 12 kg
Stabilization time	2,5 s
Warm-up time	30 min
Eccentric loading at 1/3 [Max]	5 g
Construction type of the scale	Single-range balance

Units	kg
	g
	dwt
	tl (Tw)
	tl (HK)
	ozt
	mo
	lb
	oz
	ffa
	tol
	Maximum creep (15 minutes)

KERN DE 12K1A

KERN

Versatile, successful model with stainless steel platform for flexible use

Power Supply

Supplied power supply	Power supply unit
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	UK
	US
Input voltage power supply / power [Max]	220 V - 240 V AC, 50 Hz
	Input voltage device / power [Max]
Power socket for mains adapter	Double plug, left minus, right plus, 14,3 mm × 6,1 mm long 47,5 mm
Battery / accumulator type	NiMH
Battery	9 V block
Battery connection	Plug-in terminals
Battery operating time	12 h
Rechargeable battery	NDE-A02
Rechargeable battery operating time - backlight on	15 h
Rechargeable battery operating time - backlight off	30 h
Rechargeable battery charging time	10 h
Rechargeable battery optional	Rchrg. battery optional

Environmental conditions

Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for adjustment at the location of installation	961-248
Article number for DAkkS calibration	963-128
Article number for certificate of conformity	969-517

Packing & Shipping


Delivery time	1 d
Dimensions packaging (W×D×H)	515×385×135 mm
Shipping method	Parcel service
Net weight approx.	4,8 kg
Gross weight approx.	6 kg
Shipping weight	5,568 kg

Product information

GTIN/EAN number	4045761111141
REACH classification	no prohibited substances

Pictograms

STANDARD

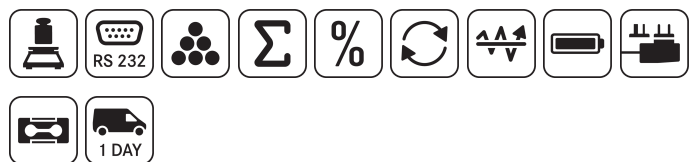

OPTION

